

Membrane Plates

2-3/8" round, 2" round
For membrane using #14, #15, K-fast,™ Dekspike,™ and T.P.R.


- Engineered barb design creates maximum wind uplift rating.
- SFS intec plates are stacked for ease of fastening pattern.



Application

Galvalume Steel Round 2" 20-Ga Barbed Plate


- Use with:
- #14 Dekfast
 - #15 Dekfast HS
 - 1/4" Dekfast Spike
 - TPR

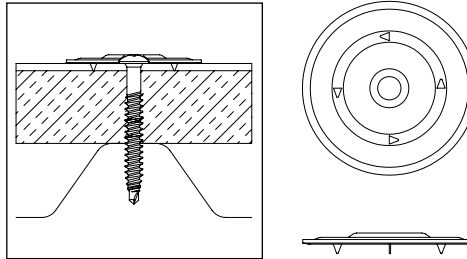

OD: 2"
ID: .265/.270"
Thickness: .038"
Finish: AZ50 Galvalume

Non-Barbed Galvalume 2" Round Membrane Plate


- Use with:
- #12 Dekfast
 - #14 Dekfast

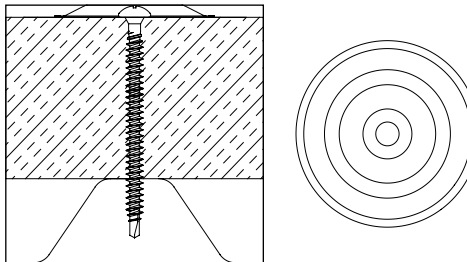

OD: 2" Round
ID: .255"
Thickness: .032"
Finish: AZ55 Galvalume

Galvalume Steel Round 2-3/8" 20-Ga Barbed Plate

- Use with:
- #14 Dekfast
 - #15 Dekfast HS
 - 1/4" Dekfast Spike
 - TPR
 - K-Fast

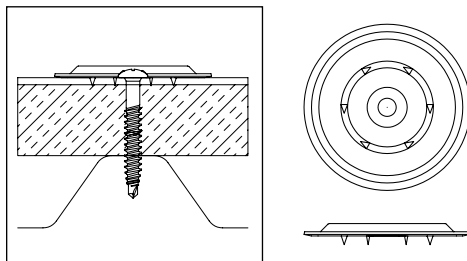

OD: 2-3/8"
ID: .260/.262"
Thickness: .038"
Finish: AZ50 Galvalume

Notes

Dimensions are nominal inches unless noted.

Selection

Item	Part No.	Carton Wt. (lbs)	Carton Qty.	Skid Qty.
Galvalume Steel Round 2", 20-Ga Barbed Plate	M7525	29	1000/pail	40,000
Non-Barbed Galvalume 2" Round Membrane Plate	M7540	34	1000/pail	50,000
Galvalume Steel Round 2-3/8", 20-Ga Barbed Plate	M7665	36	1000/pail	24,000

Approvals

Dekfast fasteners and seam plates are FM approved. Refer to current FM Approval Guide and Supplements for system manufacturers approvals.

Installation

Use in applications approved by the roofing system manufacturer.

Options

